


# CONFINED SPACE RESCUE

## ADVANCED TRIPODS

Advanced Tripods are constructed of lightweight tubular aluminum with a rugged steel head assembly. The UCT series tripods can be combined with up to three pulleys to accommodate a variety of winches and fall arrest devices to meet a wide range of confined space entry/retrieval and rescue requirements. Quick release pins positively locate components at all adjustment points for tool-less set-up and adjustment.

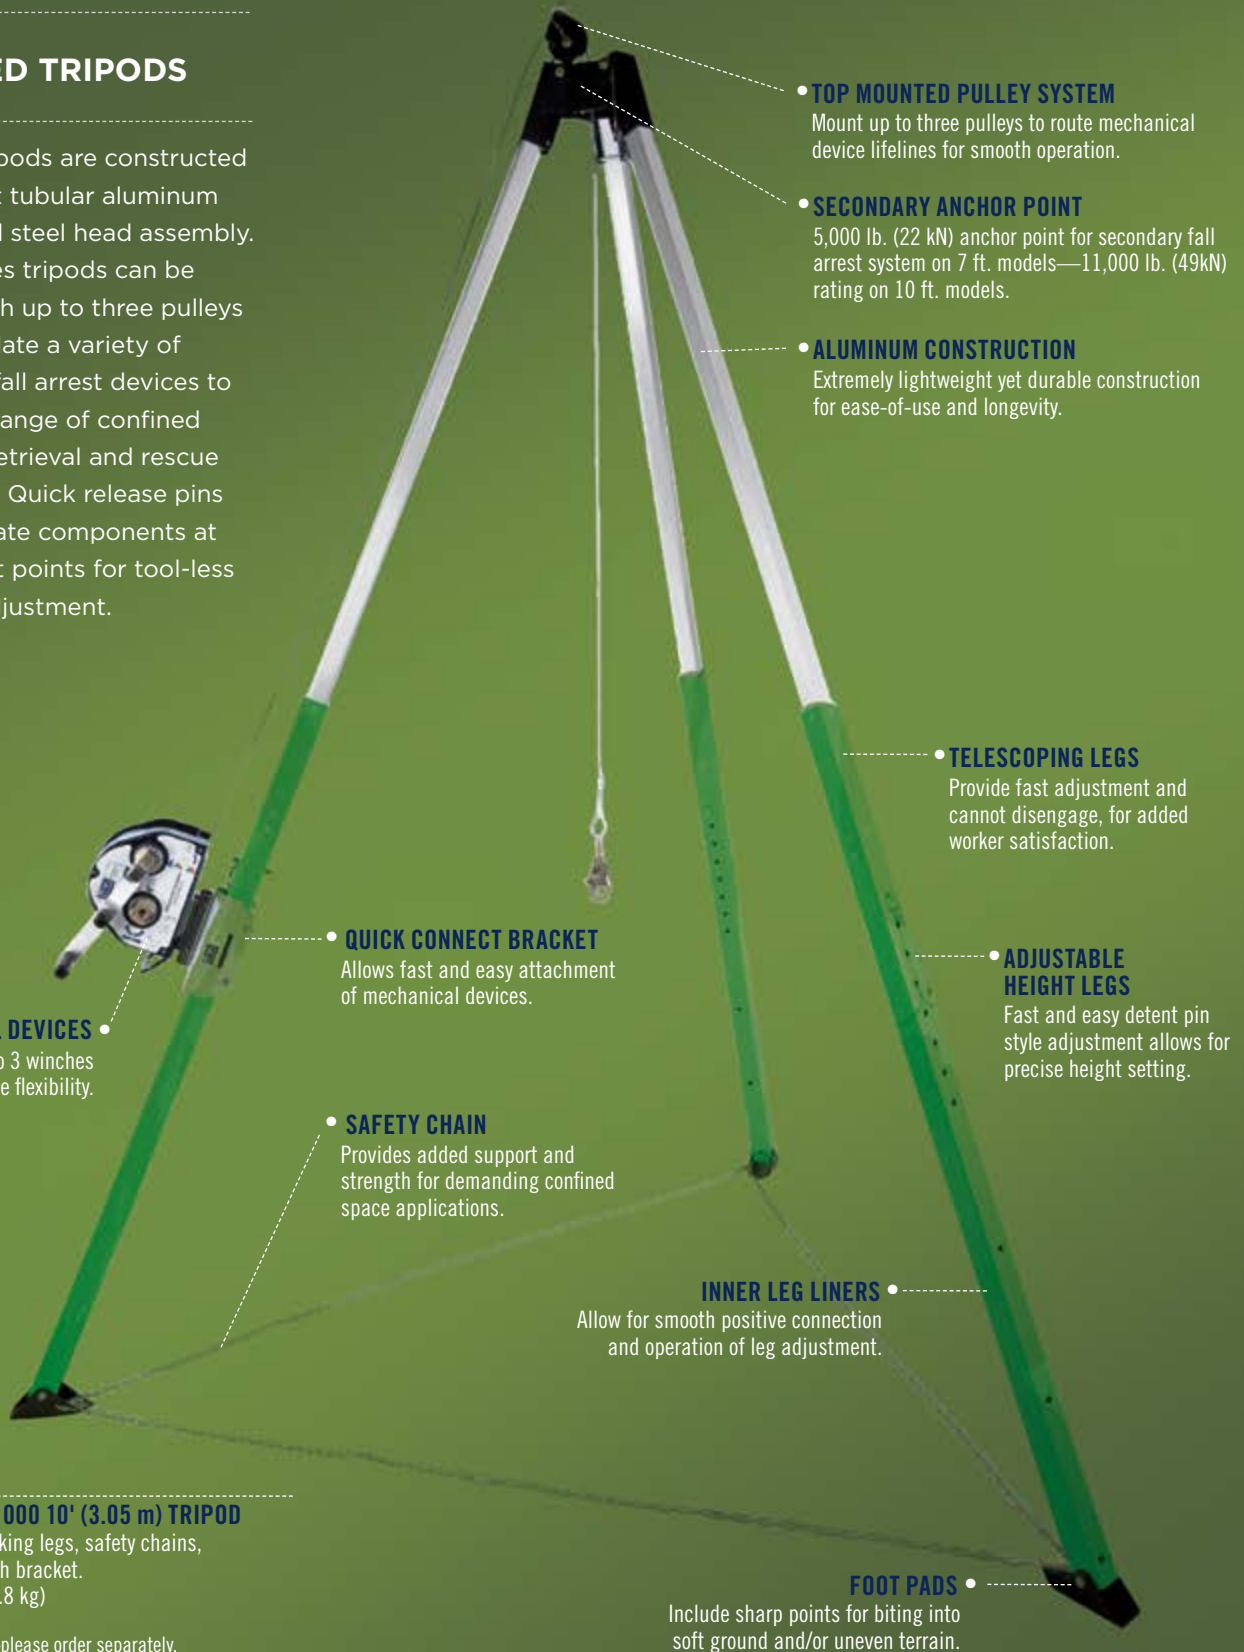

- **TOP MOUNTED PULLEY SYSTEM**

Mount up to three pulleys to route mechanical device lifelines for smooth operation.

- **SECONDARY ANCHOR POINT**

5,000 lb. (22 kN) anchor point for secondary fall arrest system on 7 ft. models—11,000 lb. (49kN) rating on 10 ft. models.

- **ALUMINUM CONSTRUCTION**

Extremely lightweight yet durable construction for ease-of-use and longevity.

- **TELESCOPING LEGS**

Provide fast adjustment and cannot disengage, for added worker satisfaction.

- **ADJUSTABLE HEIGHT LEGS**

Fast and easy detent pin style adjustment allows for precise height setting.

- **QUICK CONNECT BRACKET**

Allows fast and easy attachment of mechanical devices.

- **SAFETY CHAIN**

Provides added support and strength for demanding confined space applications.

- **INNER LEG LINERS**

Allow for smooth positive connection and operation of leg adjustment.

- **FOOT PADS**

Include sharp points for biting into soft ground and/or uneven terrain.

- **MECHANICAL DEVICES**

Can support up to 3 winches or SRLs for complete flexibility.

### 8513159

#### ADVANCED UCT-1000 10' (3.05 m) TRIPOD

With adjustable locking legs, safety chains, top pulley and winch bracket.

**Weight:** 68 lbs. (30.8 kg)

Winch not included—please order separately.



## 8513158

### ADVANCED UCT-300 7' (2.13 m) TRIPOD

- Lightweight, durable aluminum construction with powder coat finish.
- Includes quick connect winch mount bracket—can accommodate up to three brackets.
- Includes top mounted pulley system—can accommodate up to three pulleys.
- Telescoping adjustable locking legs for easy set-up.
- Fast detent pin style adjustment and locking.
- Inner plastic liners provide smooth adjustment.
- Foot pads include sharp points for biting into soft ground and/or uneven terrain.
- Safety chain for added support, strength and safety.
- 5,000 lb. (22 kN) built-in head-mounted anchor point.

Winch and SRL not included—please order separately.



## 8000000

### ADVANCED 7' (2.13 m) ALUMINUM TRIPOD

- Lightweight, durable aluminum construction.
- Includes quick connect winch mount bracket.
- Includes top mounted pulley system.
- Telescoping adjustable locking legs for easy set-up.
- Fast detent pin style adjustment and locking.
- Rubber safety shoes with spiked edges for different terrains.
- Safety chain for added support, strength and safety.
- 5,000 lb. (22 kN) built-in head-mounted anchor points.

Winch not included—please order separately.

### 8000010 9 FT. (2.7 M) ALUMINUM TRIPOD

With adjustable locking legs, safety chains, top pulley and winch bracket.

Winch not included—please order separately.

## ADVANCED ACCESSORIES



**8513329** Carrying bag for 7' (2.1 m) 8513158 tripod with protective plastic liner.

**8513330** Carrying bag for 10' (3 m) 8513159 tripod with protective plastic liner.

**9503094** Carrying bag for 7' (2.1 m) 8000000 tripod.

**9503095** Carrying bag for 9' (2.7 m) 8000010 tripod.



## 8512292

### WINCH/SRL MOUNTING BRACKET FOR 8513159 TRIPOD

Attaches to the leg tube with quick-release pins for tool-less set-up and adjustment.

**Weight:** 5.2 lbs. (2.4 kg)



## 8510224

### WINCH/SRL MOUNTING BRACKET FOR 8513158 TRIPOD

Attaches to the leg tube with quick-release pins for tool-less set-up and adjustment.

**Weight:** 3 lbs. (1.4 kg)

Also see accessories on page 140 for additional bracket options.



## 8512293

### TOP PULLEY ASSEMBLY FOR UCT SERIES TRIPODS

Pulleys are mounted on top of the head assembly to route mechanical device's lifeline over and into confined space area.

**Weight:** 1.6 lbs. (.73 kg)